

**INSTALLER: Leave this manual with the appliance.**  
**CONSUMER: Retain this manual for future reference.**

These instructions are supplementary to the Installation and Operating Instructions supplied with the fireplace and should be kept together. Refer to the Installation and Operating Instructions for proper gas supply, safety requirements and operating instructions.



**TOWN & COUNTRY**  
LUXURY FIREPLACES

## **TC54 BLACK DIAMOND BURNER KIT INSTRUCTIONS**




**PART# TC54.NG03D  
For TC54 Series D  
Fireplaces**





## Contents of Package

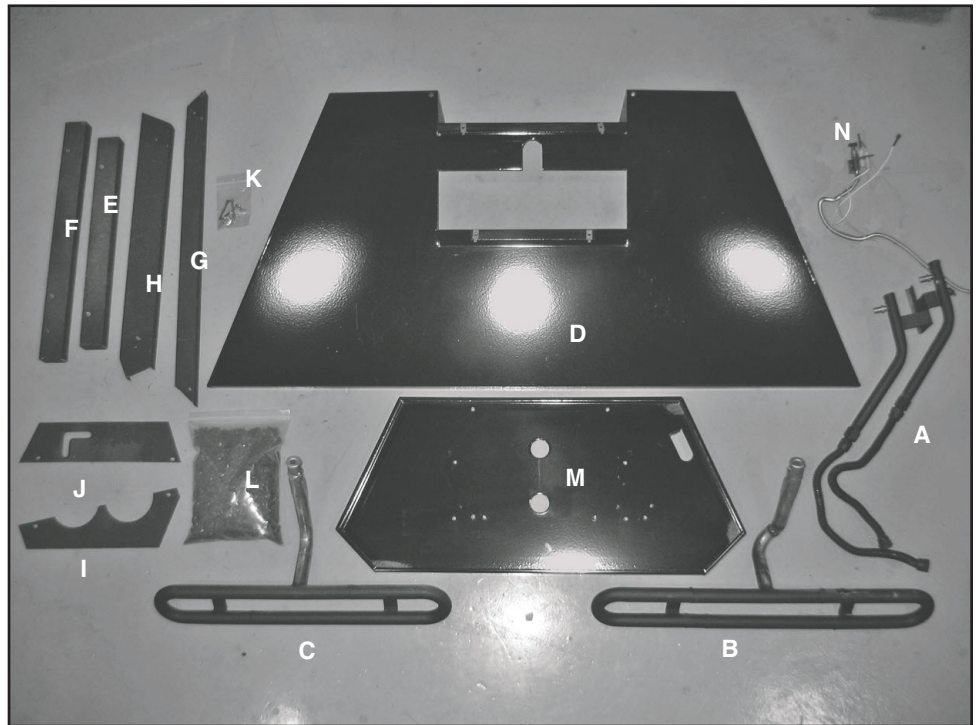

- A** MANIFOLD ASSEMBLY  
(including supply tube)
- B** BURNER TUBE, FRONT
- C** BURNER TUBE, REAR
- D** BURNER SHIELD
- E** MEDIA SPACER, Rr Center
- F** MEDIA SPACER, Fr Center
- G** MEDIA SPACER, Front
- H** MEDIA SPACER, Rear
- I** MEDIA SPACER, Left
- J** MEDIA SPACER, Right
- K** HARDWARE PACKAGE
- L** 5 lbs. GLASS MEDIA
- M** BURNER TRAY
- N** PILOT
- O** CONVERSION KIT (not shown)



# Black Diamond Burner Installation

## NOTE:


If unit is to be converted to Propane, see Propane conversion instructions on page 8 before proceeding.

The panel set instructions must be used when installing this burner. Typically all panels except the right side should be installed prior to burner installation.

**NOTE:** Plug the 4 vacant holes in the bottom of the firebox with #8x1/2" screws. The holes are not required for this style of burner.


**NOTE:** Pilot and manifold plumbing and wires are grouped and tied at the factory to ensure proper connection. Nylon zip ties must be removed after connections have been made, and prior to ignition.

Fig #1

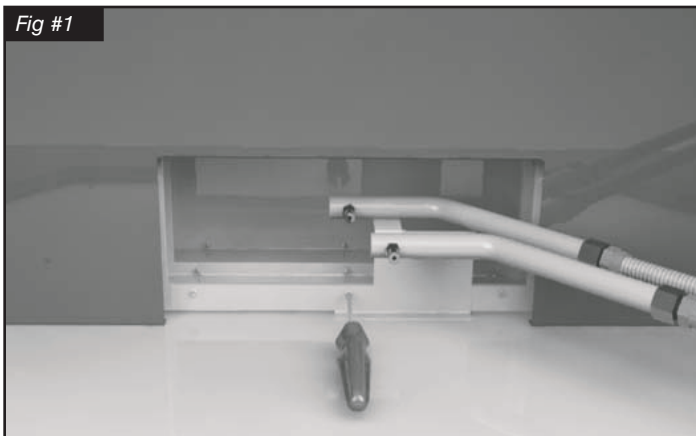

1. Remove one screw from the center rear of the firebox and use it to attach the manifold assembly. (Fig. #1)

Fig #1b

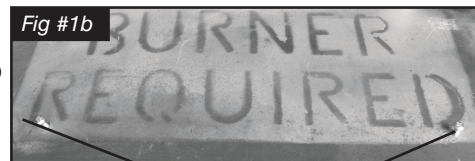


INSTALL MANIFOLD ASSEMBLY

SCREWS


2. Remove the 2 screws from the firebox bottom. (Fig. #1b)

Fig. #2

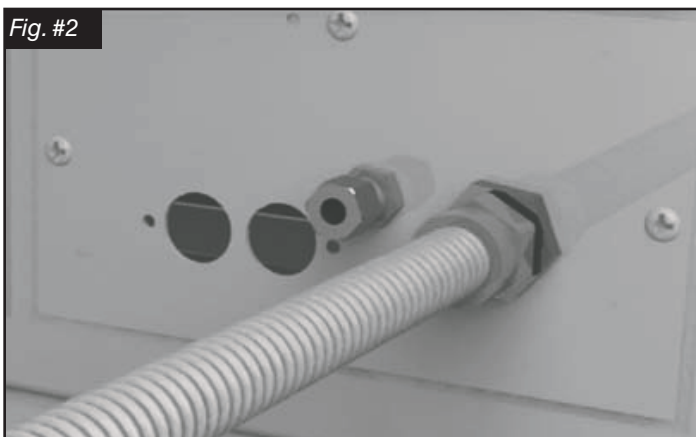

3. Attach the manifold supply tube from the lower manifold to the front bulk head fitting and tighten. (Fig. # 2)

Fig. #3

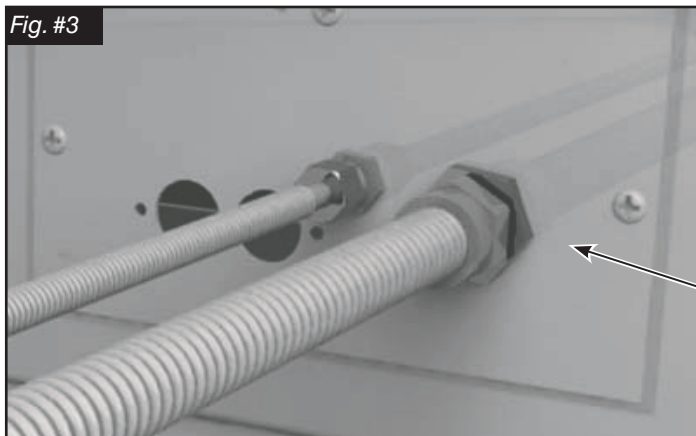

GAS CONNECTIONS

4. Attach the pilot supply tube from the forward pilot to the front bulk head fitting and tighten. (Fig. # 3)





5. Remove access cover from side of firebox.

6. Remove access cover from side of firebox. Secure the bulkhead plate and gasket to the firebox. (2 screws) Attach the ignition and sensor wires to the module on the front valve. Red end to the connector marked by the red dot, white end to the connector marked by the white dot. Repeat for the rear valve. (Fig. #4 & 4b)


7. Place burner shield into unit, flexing right shield leg slightly to clear manifold. Make sure the pilot protrudes through the center hole. (Fig. #6)

**NOTE:** The shield sits at an approximately 15 degree angle to the base of the firebox.

8. Cover the glossy surface of the burner shield to prevent surface damage while connecting pilot to the underside of the burner tray. (Fig. #7)

**NOTE:** Start screws with fingers first to prevent cross-threading.


9. Place front media spacer to the front of the tray. (Fig. #8)

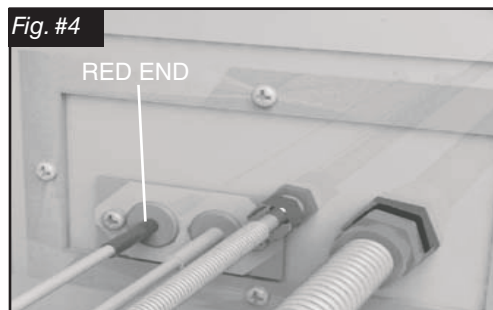

INTERFACE  
MODULE

IGNITION  
WIRE (RED)

FLAME  
SENSOR  
WIRE  
(WHITE)

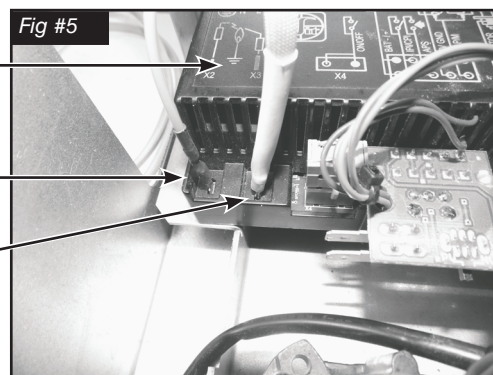

INSTALL SHIELD



ATTACH PILOT







INSTALL FRONT MEDIA SPACER


Set the air shutter to fully open for Propane or fully closed for Natural gas.

10. Install front burner tube by tilting it into front tray hole until almost fully seated. (Fig. #9)




INSTALLING FRONT BURNER

11. Guide tray and burner tube back until the burner tube engages the forward orifice. This can be seen through the rear burner hole. (Fig. #10)

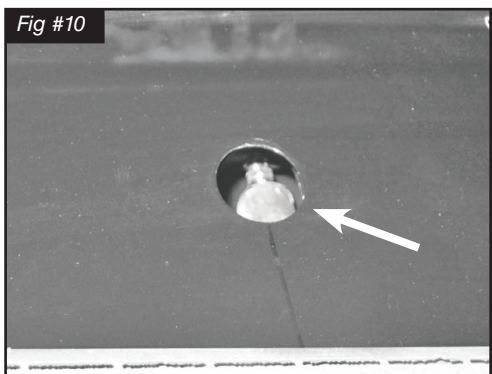

BURNER TUBE PLACEMENT

12. Attach burner tray to shield with four screws. (Fig. #11)

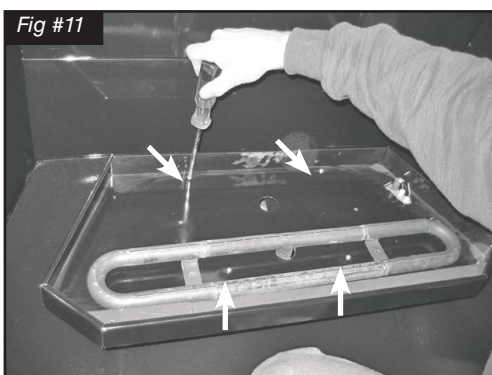

BURNER TRAY ATTACHMENT





13. The rear media spacer is now installed.  
(Fig. #12)


REAR MEDIA SPACER



**Set the air shutter to fully open  
for Propane or fully closed for  
Natural gas.**

14. Install rear burner by tilting the inlet through the rear hole in the tray. Engage the inlet with the rear orifice. This can be seen from the back of the tray.  
(Fig. #13)

INSTALL REAR BURNER

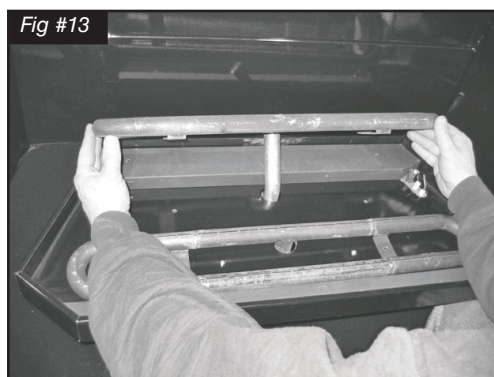


15. Install center media spacers and screw down through burner and tray with 1 1/2" screws. (Fig#14).  
Three holes must line up to set each screw.

MEDIA SPACER  
INSTALLATION






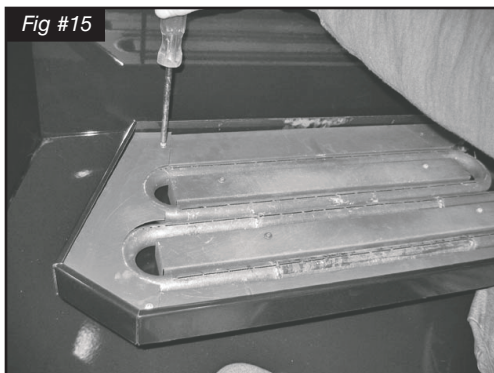

◀ LEFT MEDIA SPACER

16. Install the left media spacer and secure to front and rear media spacers with two screws. (Fig. #15)

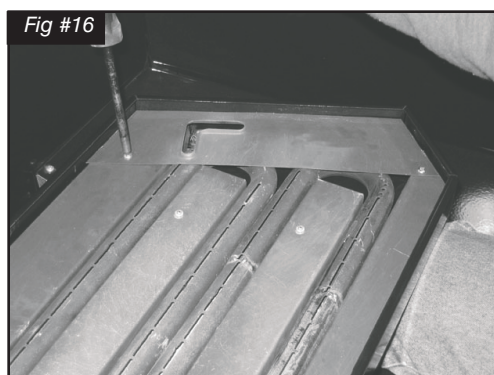

◀ RIGHT MEDIA SPACER

17. Install right media spacer and secure to front and rear media spacers with two screws. (Fig. #16)

18. Apply just enough glass media to cover the burner assembly. (Fig #17 & 18)  
**Use caution not to get any glass media into the pilot slot.**

**NOTE: Too much tumbled glass over the burner will cause sooting with the use of propane gas.**



◀ GLASS MEDIA PLACEMENT

FINISHED INSTALLATION OF GLASS MEDIA ▶





# Propane Conversion

Kit # TC54_D.LPD for use with model: TC54 Pour utilisation avec du modèle: Series D	
Date:	
By / Par:	
<b>PACIFIC ENERGY</b>	
<b>LP GAS/ DU GAZ LP</b>	
12.5 in/wc / 12.5 po/c.e. (3.11 kPa)	This appliance was converted to PROPANE GAS with this kit on this date by the organization which accepts the responsibility that this conversion has been properly made. / Cet appareil est converti au gaz LP par l'emploi de la trousse de conversion par une organisation qui accepte la responsabilité pour une installation en bon état.
13.9 in/wc / 13.9 po/c.e. (3.45 kPa)	
10.0 in/wc / 10.0 po/c.e. (2.74 kPa)	
2.26 mm	
Max.: 84,000Btu (24.6kw) Min.: 66,000Btu (19.3kw)	

CONVERSION LABEL (5052.520862D)

## WARNING

This conversion kit shall be installed by a qualified service agency in accordance with the manufacturer's instructions and all applicable codes and requirements of the authority having jurisdiction.

If the information in these instructions is not followed exactly, a fire, explosion or production of carbon monoxide may result causing property damage, personal injury or loss of life.

The qualified service agency is responsible for the proper installation of this kit. The installation is not proper and complete until the operation of the converted appliance is checked as specified in the manufacturer's instructions supplied with the kit.


## CAUTION

The gas supply and electrical power must be shut off before proceeding with the conversion.



MAIN BURNER ORIFICE  
(2.26mm) Part # (5021.32)

Fig #19

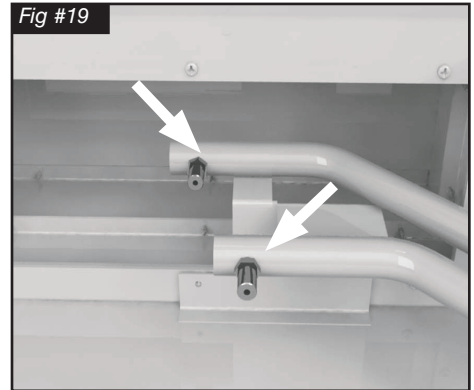

If the unit is to be used on propane, convert as follows using the components supplied with this fireplace:

Note:

Factory supplied components must be used to ensure correct input. After conversion confirm proper manifold pressure.

1. Ensure the burner, pilot and gas supply are turned off, and the appliance has cooled.
2. Using a 1/2" wrench, undo both natural gas burner orifices (marked #29). (Fig. #19)
3. Apply a small amount of pipe joint compound to the threads of the propane burner orifice (marked #44) to ensure a good seal, before screwing it into the fitting.
4. Open primary air shutters fully.
5. With a 7/16" wrench loosen the pilot head on the pilot assembly (Fig. #21)
6. Slide the pilot adjustment band over and ensure that the hole in the orifice band is showing. (Fig. #21 indicates NG position, Fig. #22 indicates LP position)

Fig #20

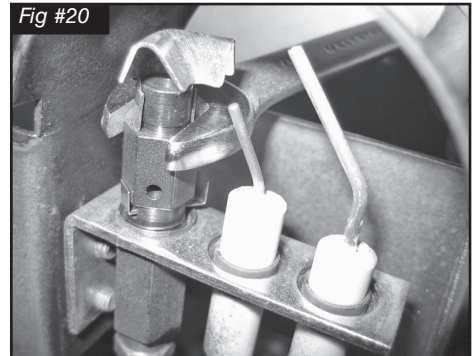


Fig #21


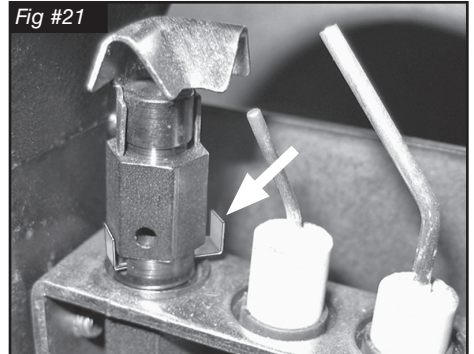


Fig #22



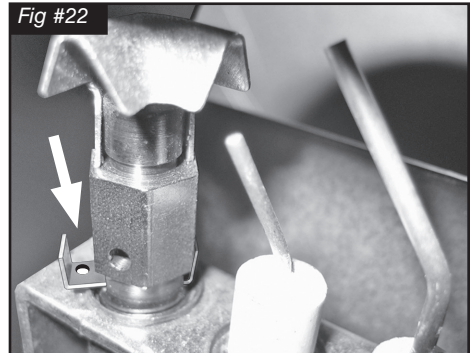

ADD NAME

Kit # TC54\_D.LPD for use with model: TC54

Pour utiliser avec du modèle: TC54

Series D

**PACIFIC ENERGY**

Date:  

By / Par:

This appliance was converted to PROPANE GAS with this kit on this date by the organization which accepts the responsibility that this conversion has been properly made. / Cet appareil est converti au gaz LP par l'emploi de la trousse de conversion par une organisation qui accepte la responsabilité pour une installation en bon état.

**LP GAS/ DU GAZ LP**

12.5 in/wc / 12.5 po/c.e. (3.11 kPa)

13.9 in/wc / 13.9 po/c.e. (3.45 kPa)

10.0 in/wc / 10.0 po/c.e. (2.74 kPa)

2.26 mm

Max.: 84,000Btu (24.6kw)

Min.: 66,000Btu (19.3kw)

071014 6-TC54 D 5052.520862D

ADD DATE

7. Fill in the date and the name of the person who performed the conversion in the white area on the conversion label. Peel off the protective backing and apply the conversion label directly over the gas specifications on the rating label.

8. Attach the access panel to the side of the firebox with the previously removed screws.

**Note: Gasket must be installed with access panel.**

**For complete valve installation instructions, refer to the instruction book included in the SIT conversion kit.**






# Gas Pressure Check

**Note:** To test the gas pressure, turn off the gas supply before removing the plug from the supply pressure test port or manifold pressure test port.

Verify gas pressures with the fireplace lit and on the highest setting.

Fig #23

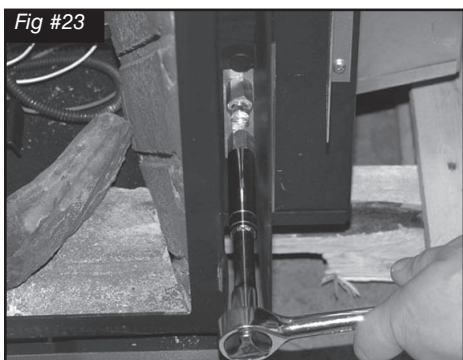

1. Remove the plug from the pressure test port using a 7/16" socket and extension. The plug is located between the right side lintel and firebox side. (Fig. #23)

Fig #23a


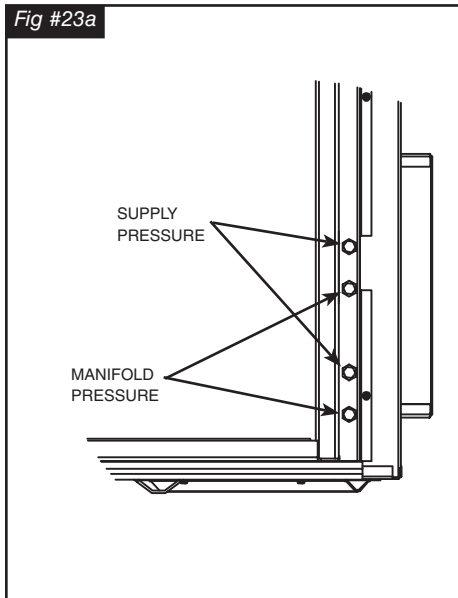


Fig #24

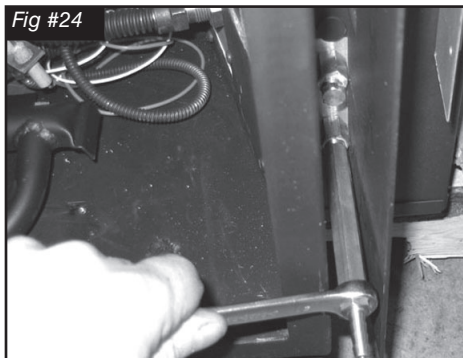

2. Thread the extension test fitting into the open test port. (Fig. #24)
3. Attach a pressure gauge onto the fitting.
4. When testing is complete remove the extension test fitting and replace the plug. Thread sealant will be required to ensure a gas tight connection.

## Correct gas pressure requirement:

Supply Pressure	Natural Gas	Propane
<b>Min. Pressure</b> (For purpose of input adjustment)	5.0" WC	12.5" WC
<b>Max. Pressure</b>	13.9" WC	13.9" WC
<b>Manifold Pressure</b>		
Maximum	3.5" WC	10" WC
Minimum	1.6" WC	6.4" WC



# Burner Flame Adjustment

The air shutter on the burner tube controls the primary combustion air to the gas burner. The shutter should be set to fully closed for natural gas or fully open for propane. See Fig. #25 for proper flame pattern.

The flame should be just orange and “lazy”:

It should NEVER be set to create sooting on internal parts and window glass.

Fig #25






# TC54 Black Diamond Replacement Parts

(WHEN ORDERING, INCLUDE PART NUMBER WITH DESCRIPTION)

ITEM.....	DESCRIPTION .....	PART NO.
#1.....	TC54 BLACK DIAMOND BURNER KIT .....	TC54.NG03.C
#2a.....	BURNER TUBE .....	TC54. 50118305
#2b .....	BURNER TUBE .....	TC42. 5011832.A
#3.....	PILOT ASSEMBLY, CONVERTIBLE .....	TCRP.5005025B
#4.....	ORIFICE, NG (#29) (2 Required) .....	5022.135
* #5.....	MANIFOLD ASSEMBLY .....	TC54.9654
* #6.....	GLASS MEDIA .....	TCRP.501201
* #7.....	PROPANE CONVERSION KIT.....	TC54.LPCE01

\* NOT SHOWN

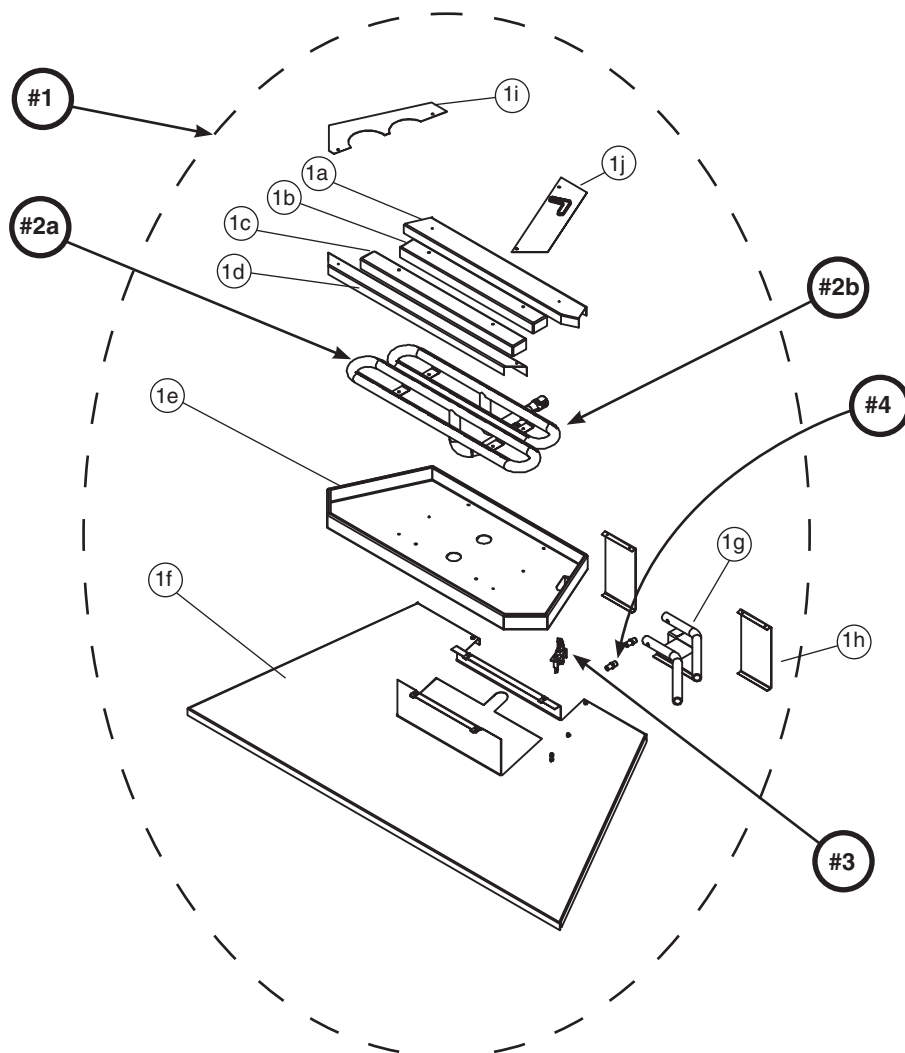



---

## Notes













Reproduction, adaptation, or translation  
without prior written permission is prohibited,  
except as allowed under the copyright laws.



**For technical support, please contact your retailer.**

**Web site: [www.townandcountryfireplaces.net](http://www.townandcountryfireplaces.net)  
2975 Allenby Rd., Duncan, BC V9L 6V8**